
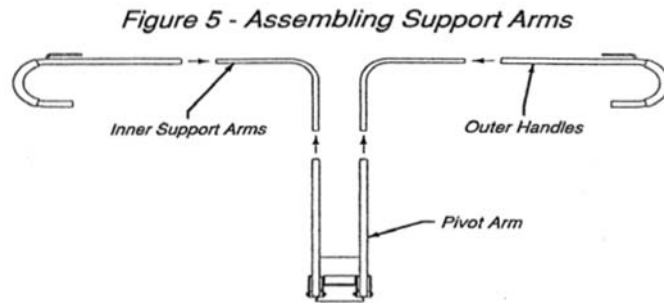


CoverMate Freestyle

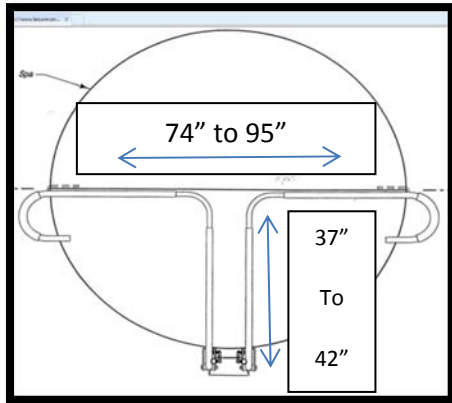

Includes

- Black powder-coated, rust-free aluminum tubing
- **Hydraulic shocks** allow for easy lifting
- **Adjustable mounting base** that slides under the spa
- Positions out of the way, allowing for full spa use and additional privacy
- Foam grips for comfortable handling
- Installs in 20 minutes

- | |
|---|
| ○ Designed for round and uniquely shaped spas |
| ○ Requires 20 inches clearance behind spa |
| ○ Works for spas between 26" and 45" tall and between 74" and 95" in length and width |

Dimensions

- ✓ Upper Bracket (aluminum): 16" L x 10 1/2" W x 5 3/8" deep
- ✓ Lower Bracket (aluminum): 25" L x 13 1/2" W x 5 3/8" deep (w/ 7 1/2" kick plate)
- ✓ Pivot Arm: 29" x 14"
- ✓ Shock (2): 13"
- ✓ Inner Support Arm: 18" x 24"
- ✓ Outer Handles: 30" x 8"