


specifications

SKB1500S-A Series

ActiveCore Series, 3 Door (Solid), Upright Fridge

Project: _____

Item No: _____

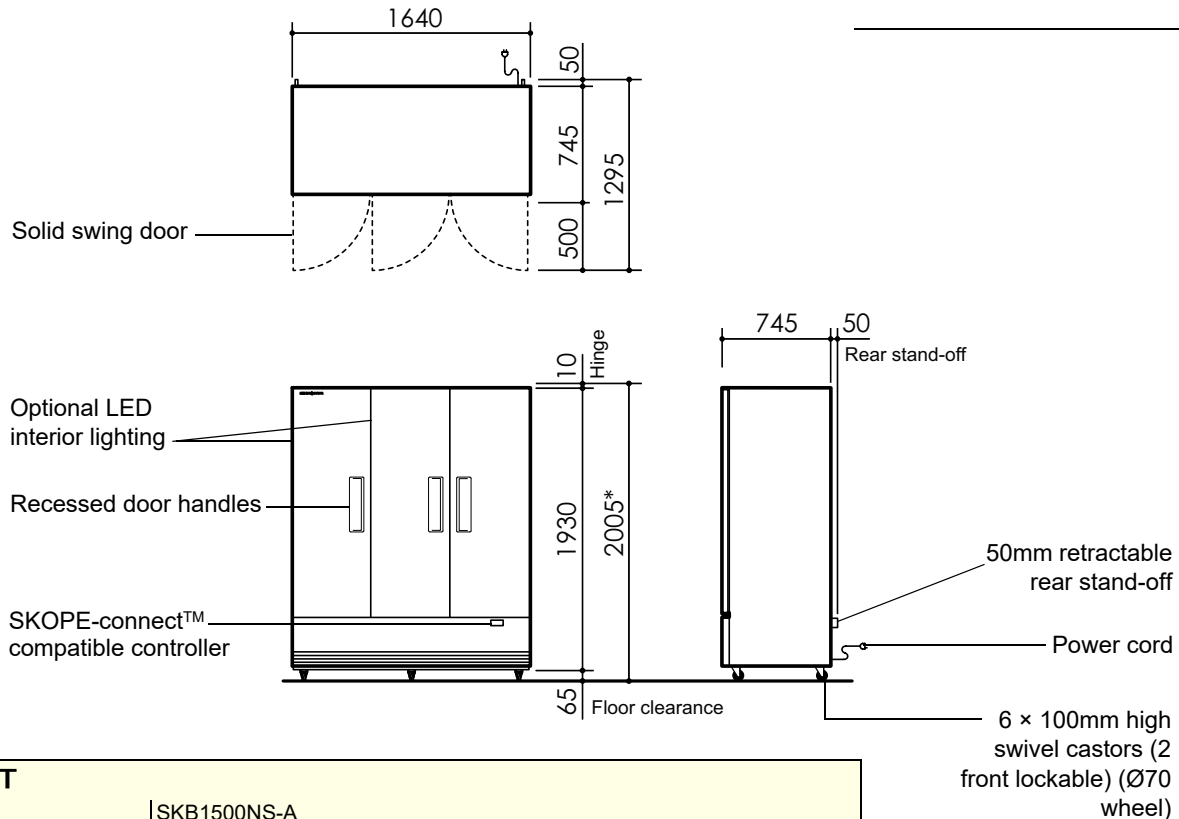

CABINET

Model ID	SKB1500NS-A
SKOPE ID	MB15SZN (no interior lights) MB15SYN (with interior lights)
Doors	3 × lockable, self-closing, foamed, solid swing doors (hinged LH, LH, RH)
Internal door opening	3 × door openings: 1454mm high × 525mm wide
Shelves	12 × wire and 3 × stainless steel Wire shelves: Adjustable height, 490mm wide x 520mm deep (4 each side) and 540mm wide x 520mm deep (4 middle) Stainless steel bottom shelves: Not adjustable, 485mm wide x 515mm deep (each side) and 545mm wide x 515mm deep (middle)
Sign	n.a.
Material	Powdercoat galvanized steel or stainless steel interior & exterior

PERFORMANCE

Max. ambient temp.	43°C
Temperature range	1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)

ELECTRICAL

Climate class	5 (40°C/40% RH)
Interior side lighting	n.a. 3 × 1370mm, 15W LED
Interior shelf lighting	n.a. n.a.
Sign lighting	n.a. n.a.
Power cord	Supplied with 2.0m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	3.4 Amps (includes unit 2.6 Amps)

REFRIGERATION

Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth® wireless technology
Refrigeration system	Bottom mounted, integral, removable ActiveCore refrigeration unit (UBHCNI-0008)
Refrigerant	R290 / 99g (natural refrigerant)
Nominal capacity	740 Watts
Heat rejection (Avg/peak)	180 Watts/215 Watts
Drainage	No plumbing required

DIMENSIONS

	External	Internal
Height	2005mm*	1454mm
Width	1640mm	1540mm
Depth	745mm	602mm
Floor area	1.30m ²	
Weight	330kg	
Volume		1433 litres

*Height 2005mm includes top door hinges

Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
Length of multiple cabinets		
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

Ventilation requirements

Top	50mm
Sides	Not required
Back	50mm
Bottom	50mm

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

PSS0581 Rev. 1.0 Aug. 2019